



Data Sheet / Tokheim Quantum™ ML AdBlue® dispenser

Adapt. Admire. AdBlue®.

Fuel Compatibility

- AdBlue®, Diesel Exhaust Fluid (DEF)

Model Availability

- Orientation: Lane. Dual-sided or Single-sided
- Grades available: 1
- Nozzles available: 1 to 4. Also available as back-2-back model for up to 5 nozzles in total on each side
- Hydraulic system: Remote Pressure
- Hose Management: Full Hose Retraction (FHR)
- Flow Rates available: 10 or 20 lpm

Hose Reach

- FHR: 4.0 meter reach

Electronics

- TQC pump computer

Displays

- Standard 6-6-4 LCD with 1.00" digits
- Premium 7-6-5 LED with 1.15" digits

Totalizers

- Electromechanical 7-digit totalizers

Communication Protocol

- IFSF LON as standard
- Other protocols available

Metering

- Secure intelligent Pulser
- Electronic calibration
- Piston meter technology using P-Meter

Heating

- Optional heating system available
- ATEX heating

Branding

- Optional customized graphics

Materials

- Painted hot dipped galvanized steel frame
- Painted hot dipped galvanized steel cladding

Corrosion Protection

- C4 protection according to ISO12944-2: 1998 as standard. Optional C5 protection available.

Operating Temperature

- From -25°C to +55°C as standard
- Optional low temperature kit option for extended temperature range -40°C to +60°C

Relative Humidity


- From 5% to 95%

IP Rating

- IP 54 electronic head

Certifications

- ATEX, OIML, MID

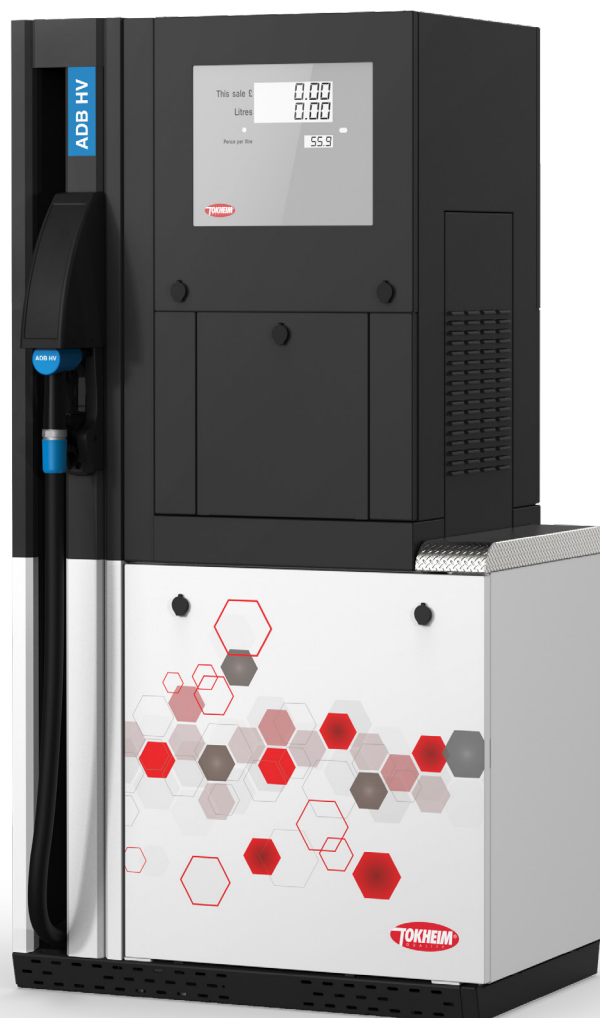

DFS Worldwide Brands



©2022 Dover Fueling Solutions. All rights reserved. DOVER, the DOVER D Design, DOVER FUELING SOLUTIONS, and other trademarks referenced herein are trademarks of Delaware Capital Formation Inc., Dover Corporation, Dover Fueling Solutions UK. Ltd., and their affiliated entities, registered or claimed in the United States and various other countries. 21-APR-22